

SILCOOL™ TIA208R THERMALLY CONDUCTIVE SILICONE POTTING

Description

SILCOOL TIA208R is a 2-component, thermally conductive material used for potting and gap filling. When cured at room temperature or quickly with heat, it cures to a thermally conductive rubber that adheres well to most metal and plastic substrates without the need for primers. The flowability of SILCOOL TIA208R allows it to conform to complex 3-dimensional shapes and cavities, filling voids and thereby creating a thermal path to remove heat.

Key Features and Typical Benefits

- Primerless adhesion to metals and plastics
- Good thermal conductivity
- Ease of use 1:1 mixing ratio
- Quick cure and adhesion with heat or at room temperature
- Flame retardancy: UL94V-0 certified (File No: E56745)
- Continuous operating temperature range of -40 ~ 150°C
- UL RTI rating: 150°C

Potential Applications

- Thermal potting for power supplies
- Drivers in LED light bulbs
- Ballasts and electronic devices


Typical Physical Properties (JIS K 6249)

| UNCURED PROPERTY (23°C,50%RH) | | Value | |
|--|-------------------|------------------------------------|----------------|
| Appearance | | Black (A) | Light Gray (B) |
| Viscosity | Pa·s | 4.0 (A) | 3.8 (B) |
| Mixing ratio by weight | | 1 : 1 | |
| Viscosity (mixed) | Pa·s | 4.2 | |
| Workable Life | min | 90 | |
| Flowable Life | min | 30 | |
| Cure Condition (Heat Cure) | | 70°C x 30min | |
| Cure Condition (Room Temperature Cure) | | 23°C x 24H | |
| CURED PROPERTY (70°C x 30min) | | | |
| Appearance | | Thermally conductive rubber, Black | |
| Density | g/cm ³ | 1.6 | |
| Hardness (Type A) | | 40 | |
| Thermal Conductivity *1 | W/(m·K) | 0.7 | |
| Tensile Strength | MPa | 1.6 | |
| Lap Shear Adhesion Strength (AI) | MPa | 1.5 | |
| Lap Shear Adhesion Strength (PC) | MPa | 0.9 | |
| Volume resistivity | MW·m | 8.0×10 ⁶ | |
| Dielectric strength | kV/mm | 25 | |
| Dielectric constant (60Hz) | | 3.3 | |
| Dissipation factor (60Hz) | | 0.016 | |
| UL Flame Retardancy | | V-0 | |
| UL RTI Rating | | 150 | |


*1: Hot wire method Typical properties are average data and are not to be used as or to develop specifications.

Cure Profile

Hardness Build

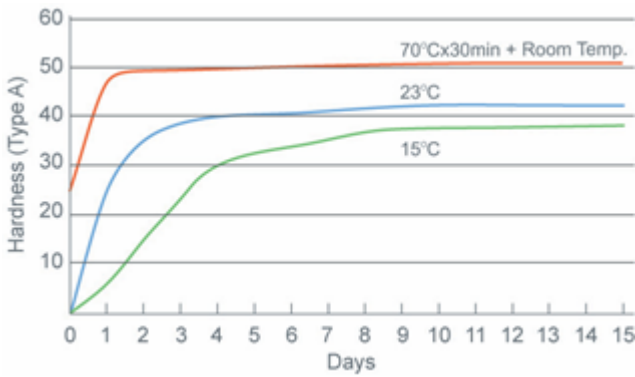

Adhesion Build

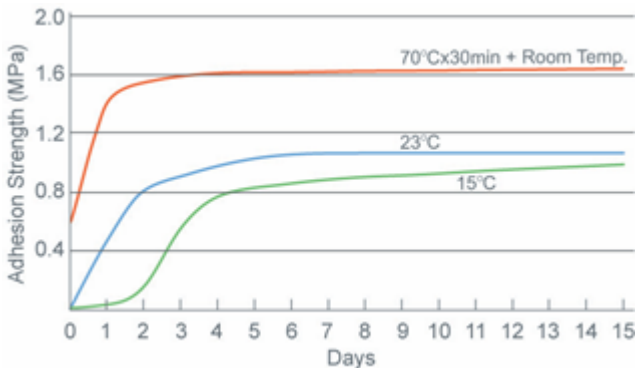

Note: Test data. Actual results may vary.

General Considerations for Use

- Stir Parts A and B prior to mixing, as filler sedimentation may occur during storage. Stirring should be repeated for any material left standing for a period exceeding 3 weeks.
- Deaerate the mixture at 10~20mmHg for about 2 minutes to remove air entrapped during mixing. The time required to de-gas the mixture will vary depending upon the volume of material.
- Materials such as water, sulfur, nitrogen compounds, organic metallic salts, phosphorus compounds, etc. contained in the surface of the substrate can inhibit curing. Preliminary testing is recommended in order to determine the compatibility.

While the typical operating temperature for silicone materials ranges from -45°C to 200°C, the long-term maintenance of its initial properties is dependent upon design

related stress considerations, substrate materials, frequency of thermal cycles, and other factors.

Current Packaging

- SILCOOL TIA208R(A) silicone: 1.5kg can in cases of 10, 25kg pail
- SILCOOL TIA208R(B) silicone: 1.5kg can in cases of 10, 25kg pail

Patent Status

Nothing contained herein shall be construed to imply the nonexistence of any relevant patents or to constitute the permission, inducement or recommendation to practice any invention covered by any patent, without authority from the owner of the patent.

Product Safety, Handling and Storage

Customers should review the latest Safety Data Sheet (SDS) and label for product safety information, safe handling instructions, personal protective equipment if necessary, emergency service contact information, and any special storage conditions required for safety. Momentive Performance Materials (MPM) maintains an around-the-clock emergency service for its products. SDS are available at www.momentive.com or, upon request, from any MPM representative. For product storage and handling procedures to maintain the product quality within our stated specifications, please review Certificates of Analysis, which are available in the Order Center. Use of other materials in conjunction with MPM products (for example, primers) may require additional precautions. Please review and follow the safety information provided by the manufacturer of such other materials.

Limitations

Customers must evaluate Momentive Performance Materials products and make their own determination as to fitness of use in their particular applications.

Contact Information

Email

commercial.services@momentive.com

Telephone

| Americas | Latin America | EMEAI- Europe, Middle East, Africa & India | ASIA PACIFIC |
|-------------------------|----------------------|---|---------------------|
| +1 800 295 2392 | Brazil | Europe | China |
| Toll free* | +55 11 4534 9650 | +390510924300 | 800 820 0202 |
| +704 805 6946 | Direct Number | Direct number | Toll free |
| Direct Number | | | +86 21 3860 4892 |
| | | | Direct number |
| *All American countries | Mexico | India, Middle East & Africa | Japan |
| | +52 55 2169 7670 | + 91 44 71212207 | +81 3 5544 3111 |
| | Direct Number | Direct number* | Direct number |
| | | *All Middle Eastern countries, Africa, India, | Korea |
| | | | +82 2 6201 4600 |

For literature and technical assistance, visit our website at: www.momentive.com

DISCLAIMER:

THE MATERIALS, PRODUCTS AND SERVICES OF MOMENTIVE PERFORMANCE MATERIALS INC. AND ITS SUBSIDIARIES AND AFFILIATES (COLLECTIVELY "SUPPLIER"), ARE SOLD SUBJECT TO SUPPLIER'S STANDARD CONDITIONS OF SALE, WHICH ARE INCLUDED IN THE APPLICABLE DISTRIBUTOR OR OTHER SALES AGREEMENT, PRINTED ON THE BACK OF ORDER ACKNOWLEDGMENTS AND INVOICES, AND AVAILABLE UPON REQUEST. ALTHOUGH ANY INFORMATION, RECOMMENDATIONS, OR ADVICE CONTAINED HEREIN IS GIVEN IN GOOD FAITH, SUPPLIER MAKES NO WARRANTY OR GUARANTEE, EXPRESS OR IMPLIED, (i) THAT THE RESULTS DESCRIBED HEREIN WILL BE OBTAINED UNDER END-USE CONDITIONS, OR (ii) AS TO THE EFFECTIVENESS OR SAFETY OF ANY DESIGN INCORPORATING ITS PRODUCTS, MATERIALS, SERVICES, RECOMMENDATIONS OR ADVICE. EXCEPT AS PROVIDED IN SUPPLIER'S STANDARD CONDITIONS OF SALE, SUPPLIER AND ITS REPRESENTATIVES SHALL IN NO EVENT BE RESPONSIBLE

FOR ANY LOSS RESULTING FROM ANY USE OF ITS MATERIALS, PRODUCTS OR SERVICES DESCRIBED HEREIN. Each user bears full responsibility for making its own determination as to the suitability of Supplier's materials, services, recommendations, or advice for its own particular use. Each user must identify and perform all tests and analyses necessary to assure that its finished parts incorporating Supplier's products, materials, or services will be safe and suitable for use under end-use conditions. Nothing in this or any other document, nor any oral recommendation or advice, shall be deemed to alter, vary, supersede, or waive any provision of Supplier's standard Conditions of Sale or this Disclaimer, unless any such modification is specifically agreed to in a writing signed by Supplier. No statement contained herein concerning a possible or suggested use of any material, product, service or design is intended, or should be construed, to grant any license under any patent or other intellectual property right of Supplier covering such use or design, or as a recommendation for the use of such material, product, service or design in the infringement of any patent or other intellectual property right.

*SILCOOL™ is a trademark of Momentive Performance Materials Inc.

The use of the "™" symbol designates registered or unregistered trademarks of Momentive Performance Materials Inc. or its affiliated companies. Momentive and the Momentive logo are trademarks of Momentive Performance Materials Inc.